



**RESTRICTOR STAYS**

**TYPE**

**PERMANENT HEAVY DUTY**

**RESTRICTOR**

**BENEFIT**

Permanent restriction tested to BS6375-2

**RESTRICTOR STAY**




**HEAVY DUTY RESTRICTOR STAYS**

The Heavy Duty Restrictor Stays give an opportunity to permanently restrict opening vents, particularly useful in applications where resident safety is required or where windows open out onto corridors or gangways.

In normal operation the restrictor stay allows the vent to open until the slider engages against the opening stop in the track.

- Tested to BS6375-2 to withstand a force of 350N for one minute
- Device provides additional friction for windows
- Available in austenitic 304\* stainless steel for enhanced corrosion resistance
- 12 year guarantee (details available upon request)

The Heavy Duty Restrictor Stays are designed to be fitted between two flat and parallel rigid faces that conform to the measurements shown below.

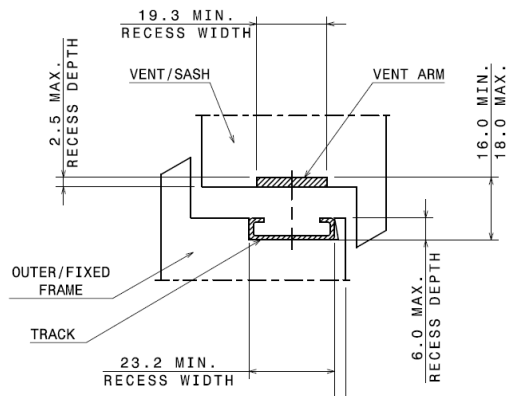

**12**  
YEAR GUARANTEE

austenitic  
**304**

\* Austenitic (was 304) stainless steel to BS EN ISO 10088-2 Grade 1.4301 for enhanced corrosion resistance



BS EN ISO9001  
Cert No. Q05105

Due to our policy of continual improvement we reserve the right to alter specifications without notice. It is the responsibility of the window manufacturer to ensure that the finished window meets the required performance and safety specification.

All transactions are subject to our standard conditions of supply, which are available on request

Ref: RSHD

**Securistyle**

Kingsmead Industrial Estate, Princess Elizabeth Way  
Cheltenham, Gloucestershire GL51 7RE, UK