

# StrongBOLT

2203

## 3 Lever Sashlock



### Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick

### Specification:

#### New features

- **Easily reversible radius latch** that uses the unique UNION **SwitchLatch** technology, **No tools are needed**, it's **Time saving** and **Simple**
- **Anti rattle adjustable strike** for on site fine tuning
- Radius plastic splinter guard for easy installation and a professional finish
- Anti-saw security features for resistance against attack
- Chamfered bolt design increases the performance of the lock under side load testing.
- Radius inner forend for ease of installation
- Deadbolt locked or unlocked by the key from either side
- 14mm deadbolt for secure positive deadlocking
- 2203S can be keyed alike with 2103S
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Hardened steel pins provide resistance to attack from sawing
- Case Size: 68mm (2.5") or 81mm (3")
- Backset: 45mm or 57mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass plated
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Zinc with hardened steel rollers
- Latch Bolt: Zinc
- Follower: Sintered Steel
- Rebate Kit: 2200REB 13mm (0.5")
- Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
- Key Blank Number: JKB SBOLT
- Packaging: Individually boxed or Visipacked

### Finish:

- SS - Satin Stainless Steel
- PB - Polished Brass finish



### Standards:

- Tested to BS EN 12209:2003

2 M 4 1 0 F 2 K D 2 A

Intumescent kit J-STRONGBOLT-SL-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item



# StrongBOLT


2203

## 3 Lever Sashlock



ASSA ABLOY

### Technical Design:

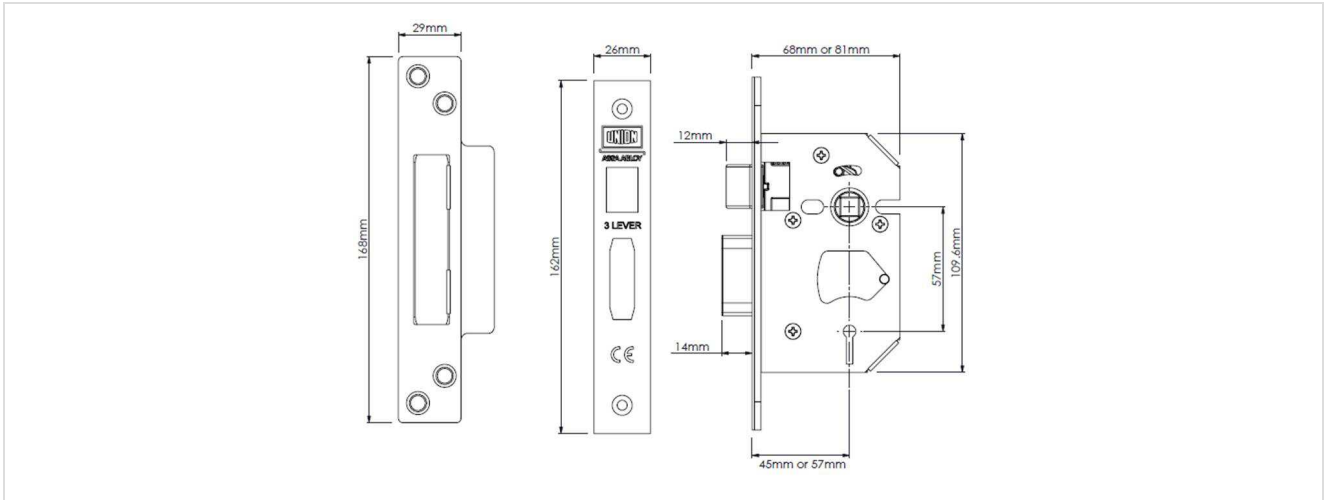

### Variants:

Code	Description
J2203S-SS-2.5	S.BOLT 3 LVR S.LOCK, SS FINISH, 2.5"CASE,
J2203S-SS-3.0	S.BOLT 3 LVR S.LOCK, SS FINISH, 3"CASE,
J2203S-PB-2.5	S.BOLT 3 LVR S.LOCK, PB FINISH, 2.5"CASE,
J2203S-PB-3.0	S.BOLT 3 LVR S.LOCK, PB FINISH, 3"CASE,
Y2203S-PB-2.5	S.BOLT 3 LVR S.LOCK, PB, 2.5"CASE, VISI
Y2203S-PB-3.0	S.BOLT 3 LVR S.LOCK, PB, 3"CASE, VISI
Y2203S-SS-2.5	S.BOLT 3 LVR S.LOCK, SS, 2.5"CASE, VISI
Y2203S-SS-3.0	S.BOLT 3 LVR S.LOCK, SS, 3"CASE, VISI
JP2203S-PB-2.5	3 LEVER SASHLOCK SQR FOREND TO PASS
JP2203S-PB-3.0	3 LEVER SASHLOCK SQR FOREND TO PASS
JP2203S-SS-3.0	3 LEVER SASHLOCK SQR FOREND TO PASS
JP2203S-SS-2.5	3 LEVER SASHLOCK SQR FOREND TO PASS