

# StrongBOLT

2205

## 5 Lever Sashlock



### Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick

### Specification:

#### New features

- **Easily reversible radius latch** that uses the unique UNION **SwitchLatch** technology, **No tools are needed, it's Time saving and Simple.**
- Chamfered bolt design increases the performance of the lock under side load testing.
- Anti-pick, anti-saw and anti-drill security features for resistance against attack
- Radius inner forend for ease of installation
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Anti-pick and keyhole protection prevents forced entry by picking
- Hardened steel pins provide resistance to attack from sawing
- Deadbolt locked or unlocked by the key from either side
- 20mm deadbolt for secure positive deadlocking and additional resistance against attack
- 2205S can be keyed alike with 2105S
  
- Case Size: 68mm (2.5") or 81mm (3")
- Backset: 45mm or 57mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass plated
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Zinc with hardened steel rollers
- Latch Bolt: Zinc
- Follower: Sintered Steel
- Rebate Kit: 2200REB 13mm (0.5")
- Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
- Key Blank Number: JKB SBOLT
- Packaging: Individually boxed and Visipacked



### Standards:

- Tested to BS EN 12209:2003

2	M	4	1	0	F	2	K	D	2	B
---	---	---	---	---	---	---	---	---	---	---

Intumescent kit J-STRONGBOLT-SL-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item



### Finish:


- SS - Satin Stainless Steel
- PB - Polished Brass finish

# StrongBOLT

## 2205

### 5 Lever Sashlock

### Technical Design:

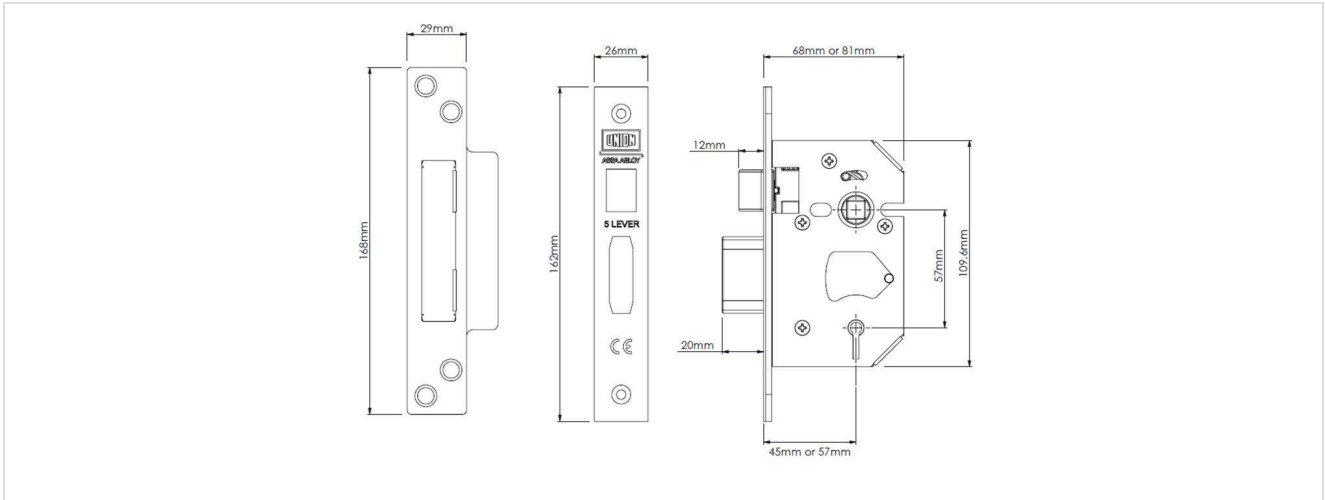

### Variants:

Code	Description
J2205S-SS-2.5	S.BOLT 5 LVR S.LOCK, SS FINISH, 2.5"CASE,
J2205S-SS-3.0	S.BOLT 5 LVR S.LOCK, SS FINISH, 3"CASE,
J2205S-PB-2.5	S.BOLT 5 LVR S.LOCK, PB FINISH, 2.5"CASE,
J2205S-PB-3.0	S.BOLT 5 LVR S.LOCK, PB FINISH, 3"CASE,
Y2205S-PB-2.5	S.BOLT 5 LVR S.LOCK, PB, 2.5"CASE, VISI
Y2205S-PB-3.0	S.BOLT 5 LVR S.LOCK, PB, 3"CASE, VISI
Y2205S-SS-2.5	S.BOLT 5 LVR S.LOCK, SS, 2.5"CASE, VISI
Y2205S-SS-3.0	S.BOLT 5 LVR S.LOCK, SS, 3"CASE, VISI
JP2205S-PB-2.5	5 LEVER SASHLOCK SQR FOREND TO PASS
JP2205S-PB-3.0	5 LEVER SASHLOCK SQR FOREND TO PASS
JP2205S-SS-2.5	5 LEVER SASHLOCK SQR FOREND TO PASS